[illegible]

[illegible]

(Precision Thermo)

[illegible]



[illegible] 2 [illegible] 1 [illegible]

[illegible]


TEL.(03)3711-5201

FAX.(03)3719-3600

mail info@murayama-denki.co.jp

http://www.murayama-denki.co.jp

MD-40530

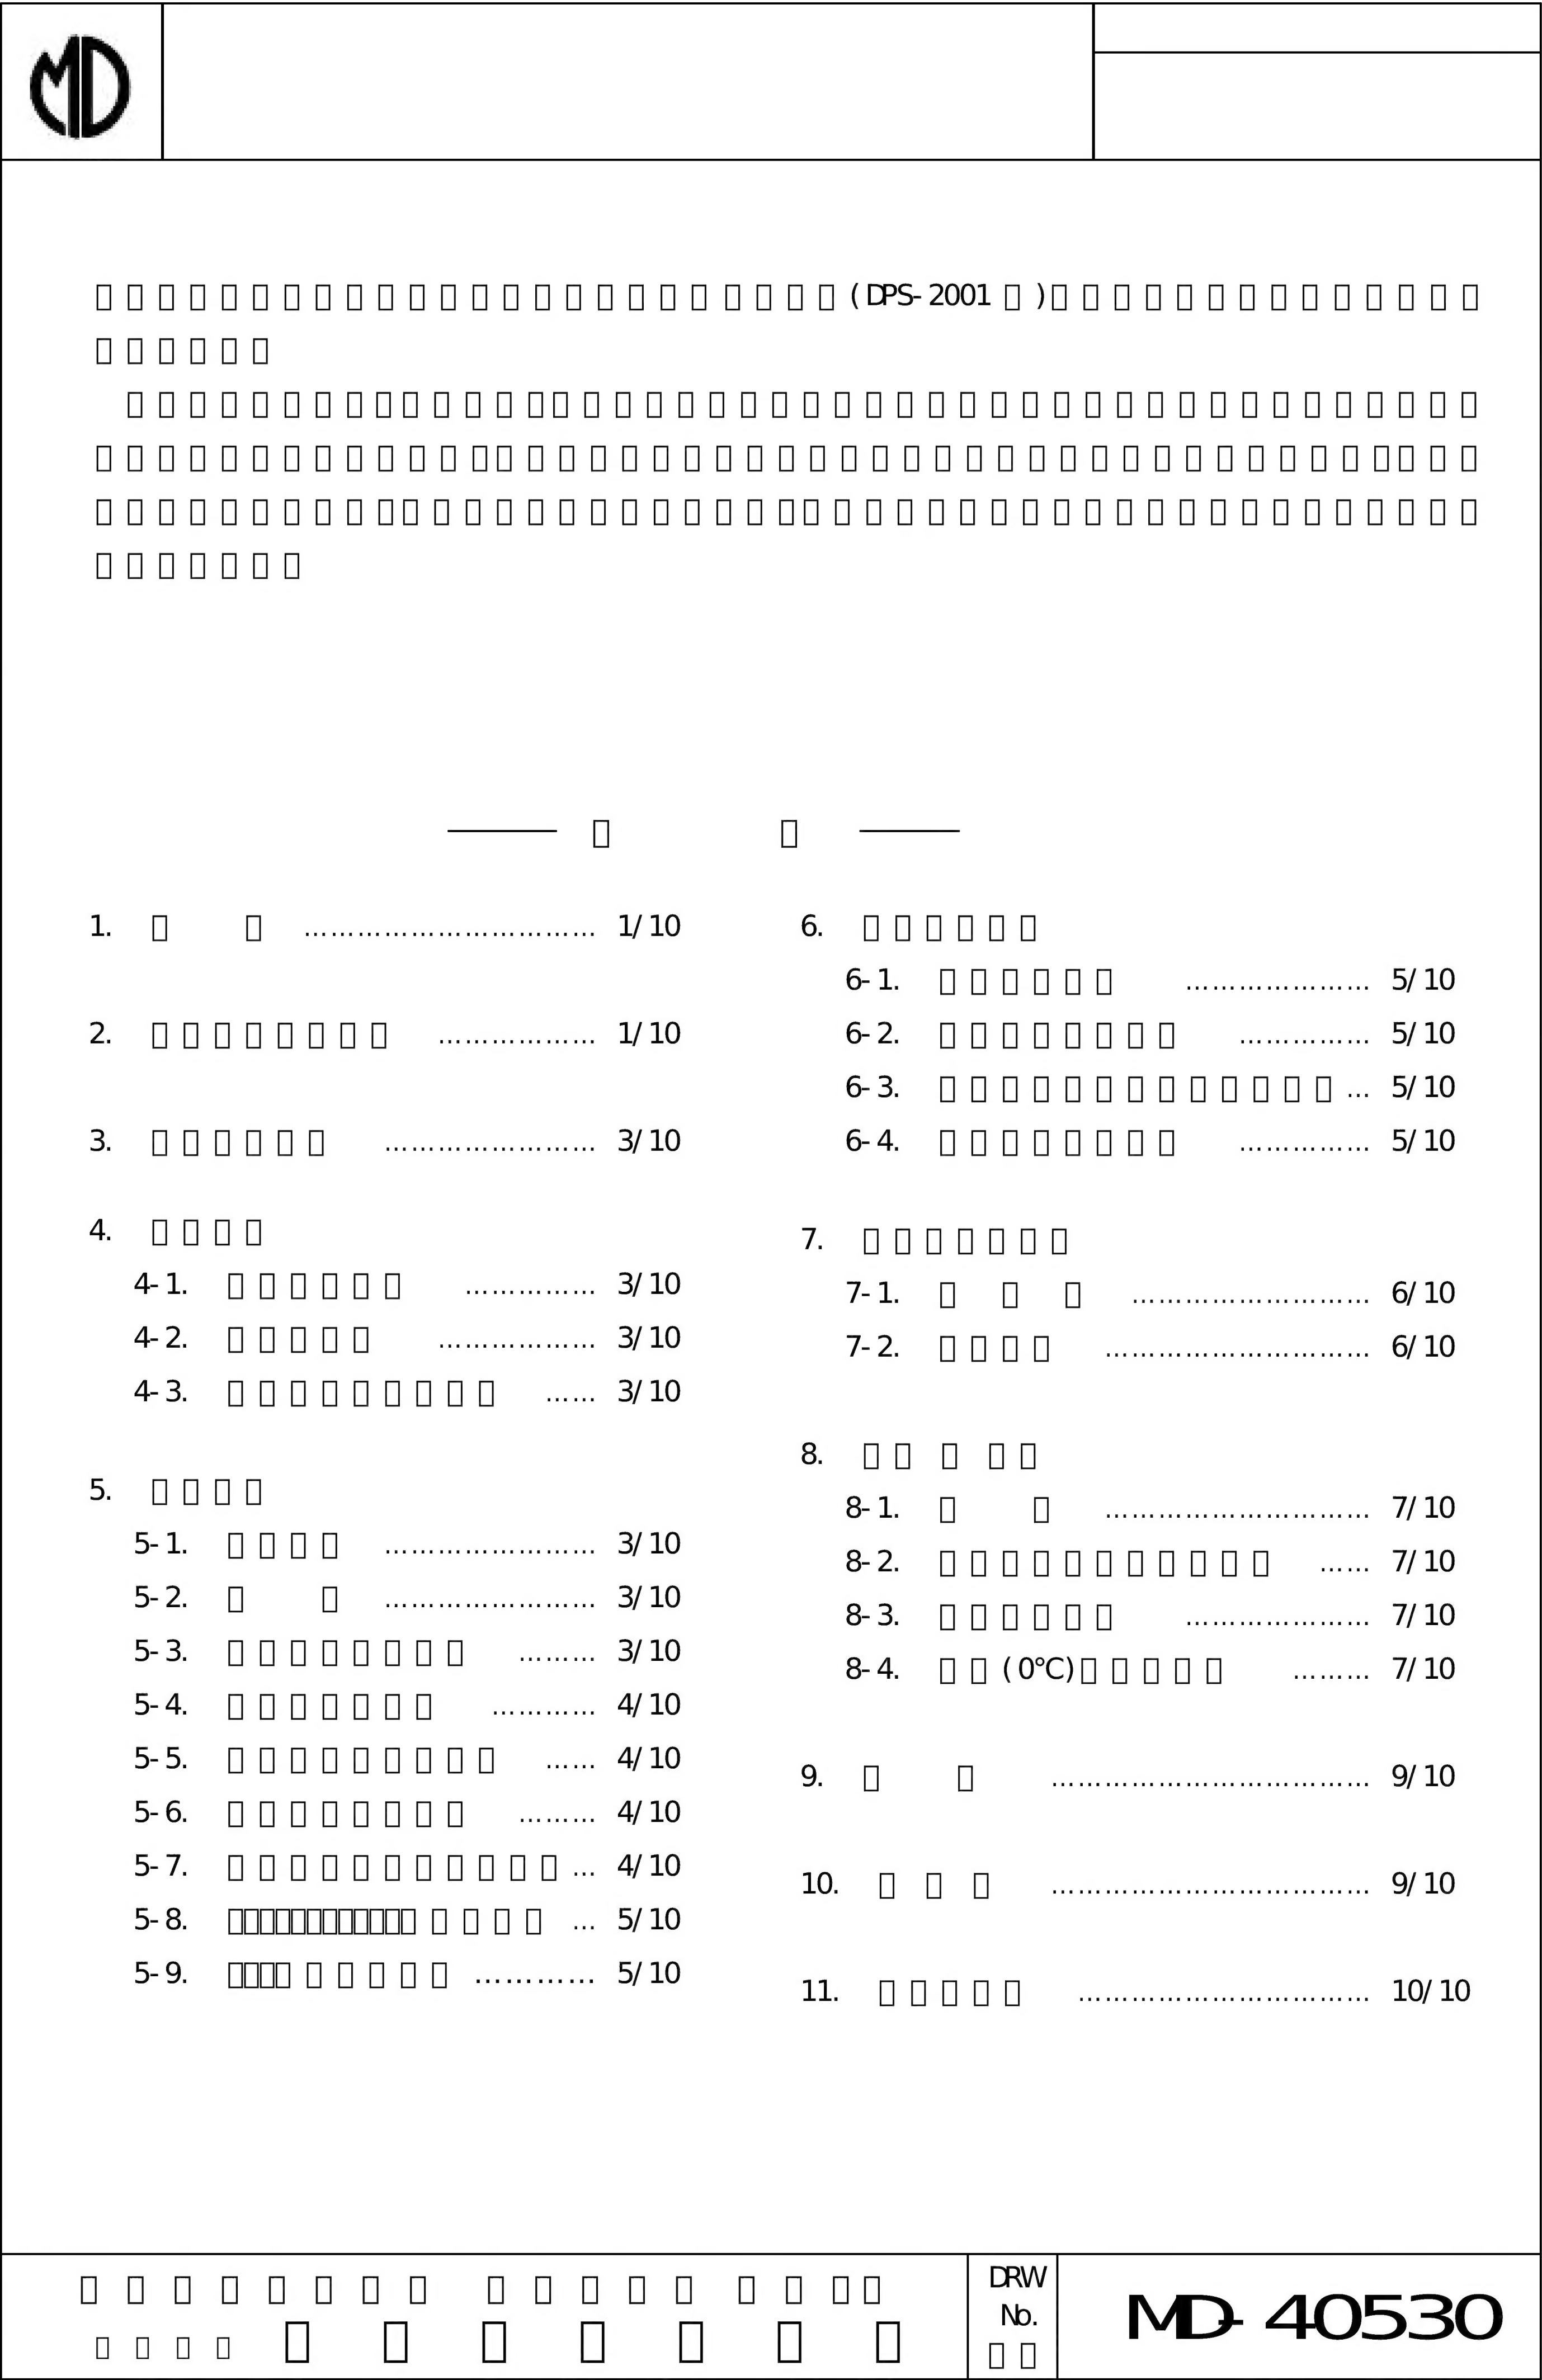

[illegible] (DPS-2001 [illegible]) [illegible]


[illegible]

[illegible]

1. □　□

□□□□□□□□□□DPS-2001□□A□□B□2□□□□□□□□□□A−B□□□□□□□
□□
□□□□□□□□□□□□□□□□□□

2. □□□□□□□□

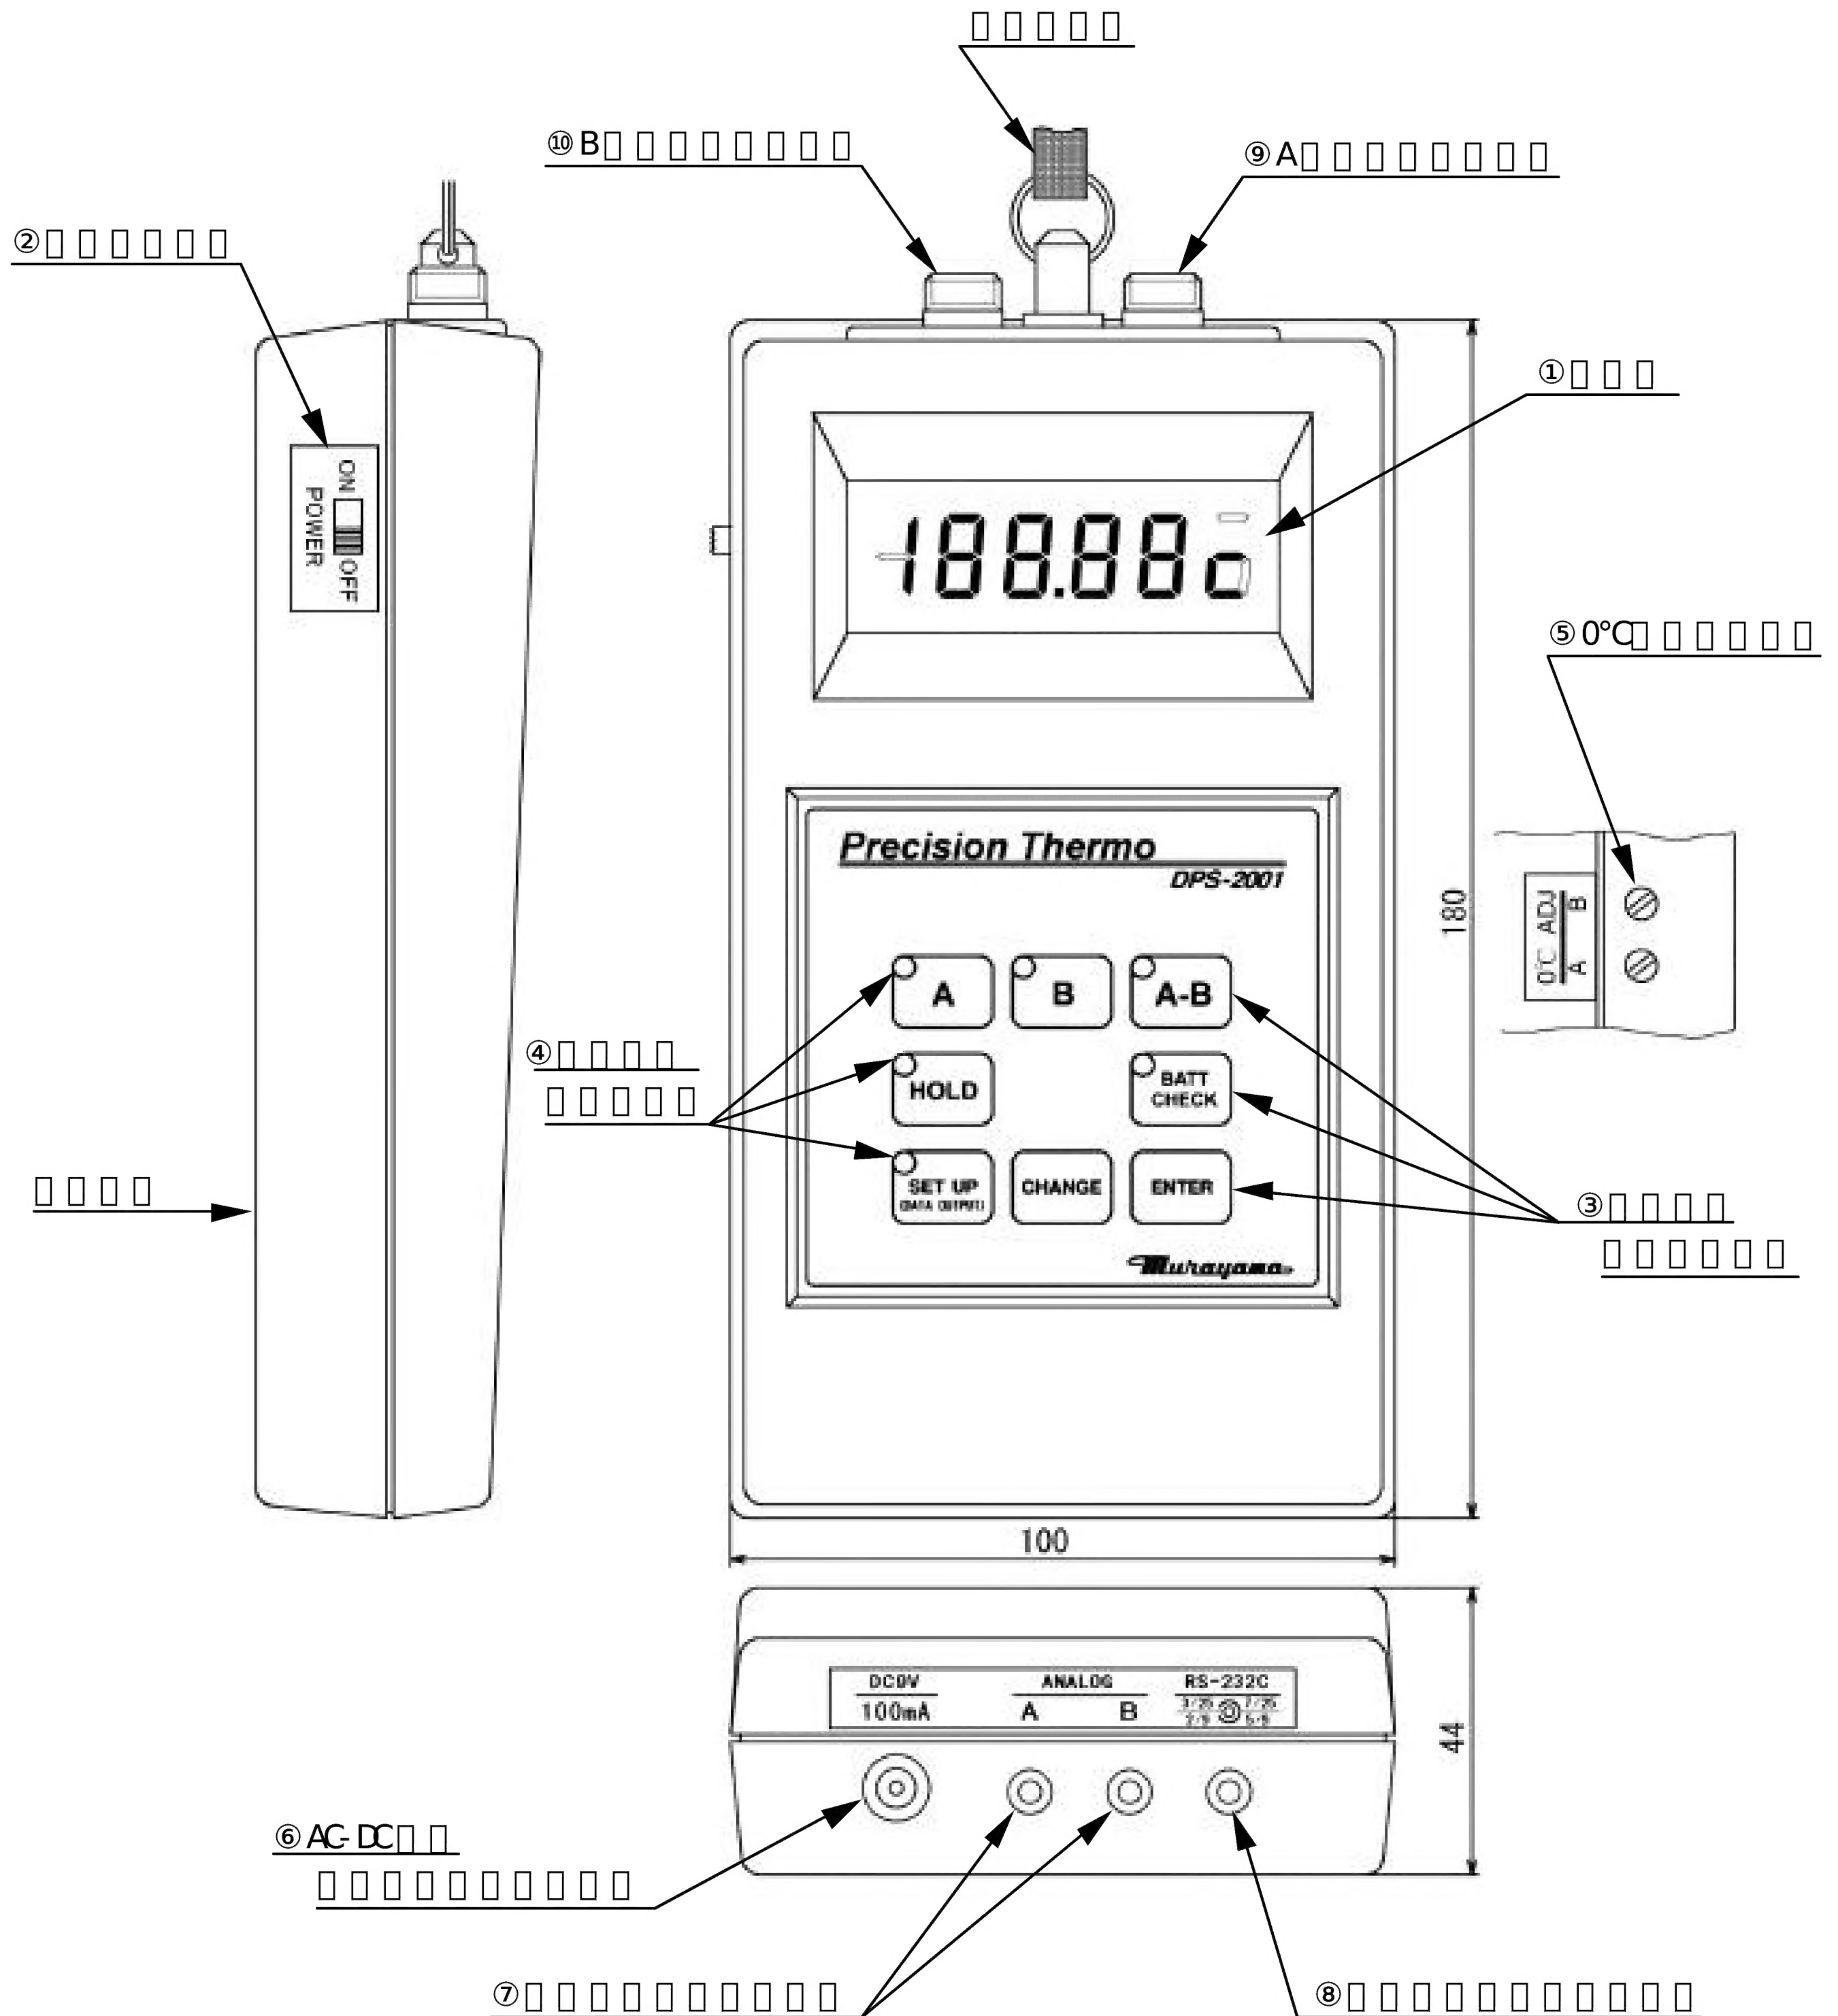

① □□□
□□□□□□□□□□□□□□□□□□

② □□□□□□
□□□□ON□,□OFF□□□□□

③ □□□□□□□□□□
[A] ………………………………… □□□A□□□□□□□□□□□□□□
[B] ………………………………… □□□B□□□□□□□□□□□□□
[A− B]……………………………… □□□A□B□□□□□□□□□□□
[HOLD]……………………………… □□□□□□□□□□□□
[BATT CHECK]…………………… □□□□□□□□□□□□□□□□□□
[SET UP] (DATA OUTPUT) ……… □□□□□□□□□□□□□□□□□□□□□□□□
[CHANGE]………………………… □□□□□□□□□□[SET UP]□□□□□□□□□□□□
[ENTER] ………………………… □□□□□□□□□□[SET UP]□□□□□□□□□□□□

④ □□□□□□□□□
③ □□□□□□□□□□□□□□□□□□□□□□□□□□

⑤ 0℃□□□□□□
□□(0℃)□□↓□□↓□□□□□□□□□□□□□

⑥ AC− DC□□□□□□□□□□□□
□□□□□□□□□□AC− DC□□□□□□□□□□□□□□□□□□□□

⑦ □□□□□□□□□□
□A□□□□□□□□□B□□□□□□□□□□□□□□□□□□□□□
□□□□□□□□10mV/℃□□□□□□□□□□□□□□□□□□□□

⑧□□□□□□□□□□□
RS-232C□□□□□□□□□□□□□□□□□□□□□
□□□□□□□□□□□□□□□□□□□□□□□□
□□□□4-4□□□□□□□□□□□□□□□□□□□□□

⑨ A□□□□□□□□
⑩ B□□□□□□□□

□ □□□
□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□4□□□□□

3. □□□□□□

① □□□□□□□□□□□□□□199.99c□□□ -199.99c□□□□□□□□
② □□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□
③ □□□□□□□□□□(4.2V□□□□□□□)□□□□□□[LoBATT]□□□□□□□
④ □□□□□□□□□[c]□□□□□□□□□□□□□□[v]□□□□□□□□□□□

□□□□□□□□ □□□□□ □□□□	DRW No. □□	MD-40530 02/10
□□□□ □□□□□□□		

4. □□□□

4-1. □□□□□□□[A]□□□[B]□□□□□□□□

2□□
□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□

4-2. □□□□□□[A-B]□□□□□□□

□□
□□□□□□□□□□□□□□□

4-3. □□□□□□□□□

[A] □□□ [B] □□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□
□□□□□□□□□□□□□□□□□□□□□□□□□□□□□

4-4. □□□□□□□□□□

□□□□□□□□□□□□□□□□□ [SET UP] □□□□□□□□□□□□□

--- □□□□□□ --- -------- □□□□ --------

① A ch □□□□NORMAL□ ………… 00:00:01__A_-030.00_[C] C/R L/F□25□□□
② B ch □□□□NORMAL□ ………… 00:00:01__B_-015.00_[C] C/R L/F□25□□□
③ A-B □□□□NORMAL□ …………… 00:00:01_AB__025.00_[C] C/R L/F□25□□□
④ □□□□□□□□NORMAL□ ……… 00:00:01_BT___5.000_[V] C/R L/F□25□□□
⑤ □□□□□□AUTO□ ……………… 00:00:01___-030.00__-015.00 C/R L/F□29□□□
□AUTO□□□□ Ach □□ Bch □□□□□□□□ _□□□□□□□□□□□□□□□□□

□5□□□□□□□□□□□□□□□□□□C/R,L/F□2□□□□□□□□□□□
□□□□□□□:□:□□□□□□□□□□□□□□□□□□□□
□□□□□□□□□□□□□□□□□□□□□□□□□□□□[SET UP] □□□□□□□□
□□□□□□□
□□□□□NORMAL□□□AUTO□□[SET UP]□□□□□□□□□□□nor□□□□□aut□□□
□□□□□□□□□□□□□□□□□□□□□□□□5-8□□□□
□AUTO□□□□□□□□□□□□□□□□□□□□□A□B□□□□□□□□□□□□□□
□□□□□□□□□□□□□□□□□□□□□□□□□□□□ --□□□□ --□□□□□□
□□□□□(C/R□L/F□□□□□□□□□□□□□□□□□□)

5. □□□□

5-1. □□□□

(1) □□□□OFF□□□□□□□□□□□□
(2) □□□A□□B□□□□□□□□□□ □ □□□□□□□□□□□□□□□□□□□□□
□□□□□□□□□□□□□□□□□□□□ A □□□□ B □□□□□□□□□□□
(□) □□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□
□□
(3) □□□□□□□□□□□□□□□□□□□□ □□□□□□□□□□□□□□□□□□
□□□□□□□□□□□□□□□□□□□□□□□
(4) □□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□
□□□□□□□□□□□□□□□□□□□□□□□□□□□□
□4□□□□□□□□□□□□□□□□
(5) □□□□□□□□□□AC-DC□□□□□□□□□□□□□□□□□□

5-2. □ □

(1) □□□□□□□□□50mm□□□□□□□□□□□□□□□□□□□□□□□□□□□
□□□□□□□□□□□□



(2) □□□□ON□□□□□□□□□□□□□□□□□□□□□□□□ON□□□□□□□□
□□□□□□□□□□□□[A]□□□□□□□□

(3) □□□□□□
□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□0.01℃□□□□
□□□□□□□□

(4) □□□[A—B]□□□
□□□□□□□□□□□[A—B]□□□□□□□□A□□□□B□□□□□□□□□
□□□□□□□□□□0□±20℃□±19.99℃□□□□□□□□□□□

5-3. □□□□□□□□
□□□□□□□□□□□[HOLD]□□□□□□□□□□□□□□□□□□(□□□□)□□□
[HOLD]□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□
□□[HOLD]□□□□□□□□□□□□□□□□□□□□□□□□

5-4. □□□□□□□
□□□□□□□□□□□□(−199.99□+199.99□□□)□□□□□□□□□□−199.99□
□199.99□□□□□□□□□□□□□□□□□

5-5. □□□□□□□□□[BATT CHECK]
[BATT CHECK]□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□
□□□AC-DC□□□□□□□□□□□□□□□□□□□□□□□□□□□□□5.000V□□
□□□□□
□□□□□□□□□□□4.2V□□□□□□□□□□□□□□□□□□□□□□□□□□□
□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□

5-6. □□□□□□□

	□□□□			□□□□ □□□□	□□
	A□□□	B□□□	□□□		
□□□□	−100□+200℃		−20□+20℃	4.0□8.0V	
□□□	0.01℃			0.001V	
□□□□(1)	−20□+50℃□□□ : ±0.1℃			±0.05V	
□□□□(2)	□□□□□□ : □□□□±0.2□				
□□□□□	±199.99℃			—	
□□□	Pt 100 4□□□		A−B	—	

5-7. □□□□□□□□□□□
□□
□□□□□□□□□□□□□□□□□□□□□□□□□□□□

	□□□□□□□□□□			□□
	A□□□	B□□□		
□□□□	10mV/℃			
□□□□	□□□□□□□(5-5.□□)			
□□□□□	□510Ω			
□□□□	100kΩ□□			

5-8. [illegible]

[illegible] [SETUP] (DATA OUT) [illegible] 3 [illegible]
[illegible]

[illegible] → ① [illegible] → ② [illegible] → ③ [illegible] →

① [illegible] [CHANGE] [illegible] (nor) [illegible] (aut) [illegible]
[illegible]
[illegible] A [illegible] B [illegible] (4-4 [illegible])

② [illegible] [CHANGE] [illegible] 1 [illegible] 30 [illegible]
[illegible] 9 [illegible]

③ [illegible] [CHANGE] [illegible] 1200/2400/4800/9600 [illegible] bps [illegible]

※ [illegible] [ENTER] [illegible]
[illegible] [CHANGE] [illegible]
[illegible]
[ENTER] [illegible]
[illegible]

※ [HOLD] [illegible]

5-9. [illegible]

[illegible] CPU ([illegible]) [illegible]
[illegible] A → B [illegible]
[illegible]
[illegible] A [illegible] B [illegible]
A [illegible] B [illegible]
A-B [illegible] BATT [illegible] B [illegible]

※ [illegible] A / B [illegible]
[illegible]
[illegible]
[illegible] A / B [illegible]
[illegible]

6. [illegible]

6-1. [illegible]

[illegible] 23℃±5℃ [illegible]

6-2. [illegible]

[illegible]

6-3. [illegible]

(1) [illegible] ([illegible]) [illegible] 100kΩ [illegible]
(2) [illegible]
[illegible] IC [illegible]

6-4. [illegible]

(1) [illegible] 3 [illegible] 1.5V [illegible] 100 [illegible]
[illegible]
(2) AC−DC [illegible]
[illegible] ([illegible]
[illegible]) [illegible]

7. [illegible]

7-1. [illegible]


(1) [illegible]
(2) [illegible]
(3) [illegible]
(4) [illegible]
(5) [illegible]
(6) [illegible] ABS [illegible] 60℃ [illegible]
(7) [illegible]

7-2. [illegible]

[illegible]

検出部
プローブ (SUS)
スリーブ (SUS)
コネクタ
相番号
コード
コネクタ固定ネジ
ゴムブッシュ

(1) [illegible] −100 [illegible] +200℃ [illegible] ([illegible]) [illegible]
(2) [illegible]
(3) [illegible] 120℃ [illegible]
(4) [illegible]
(4) [illegible]
(6) [illegible]
(4) [illegible]
(8) [illegible]

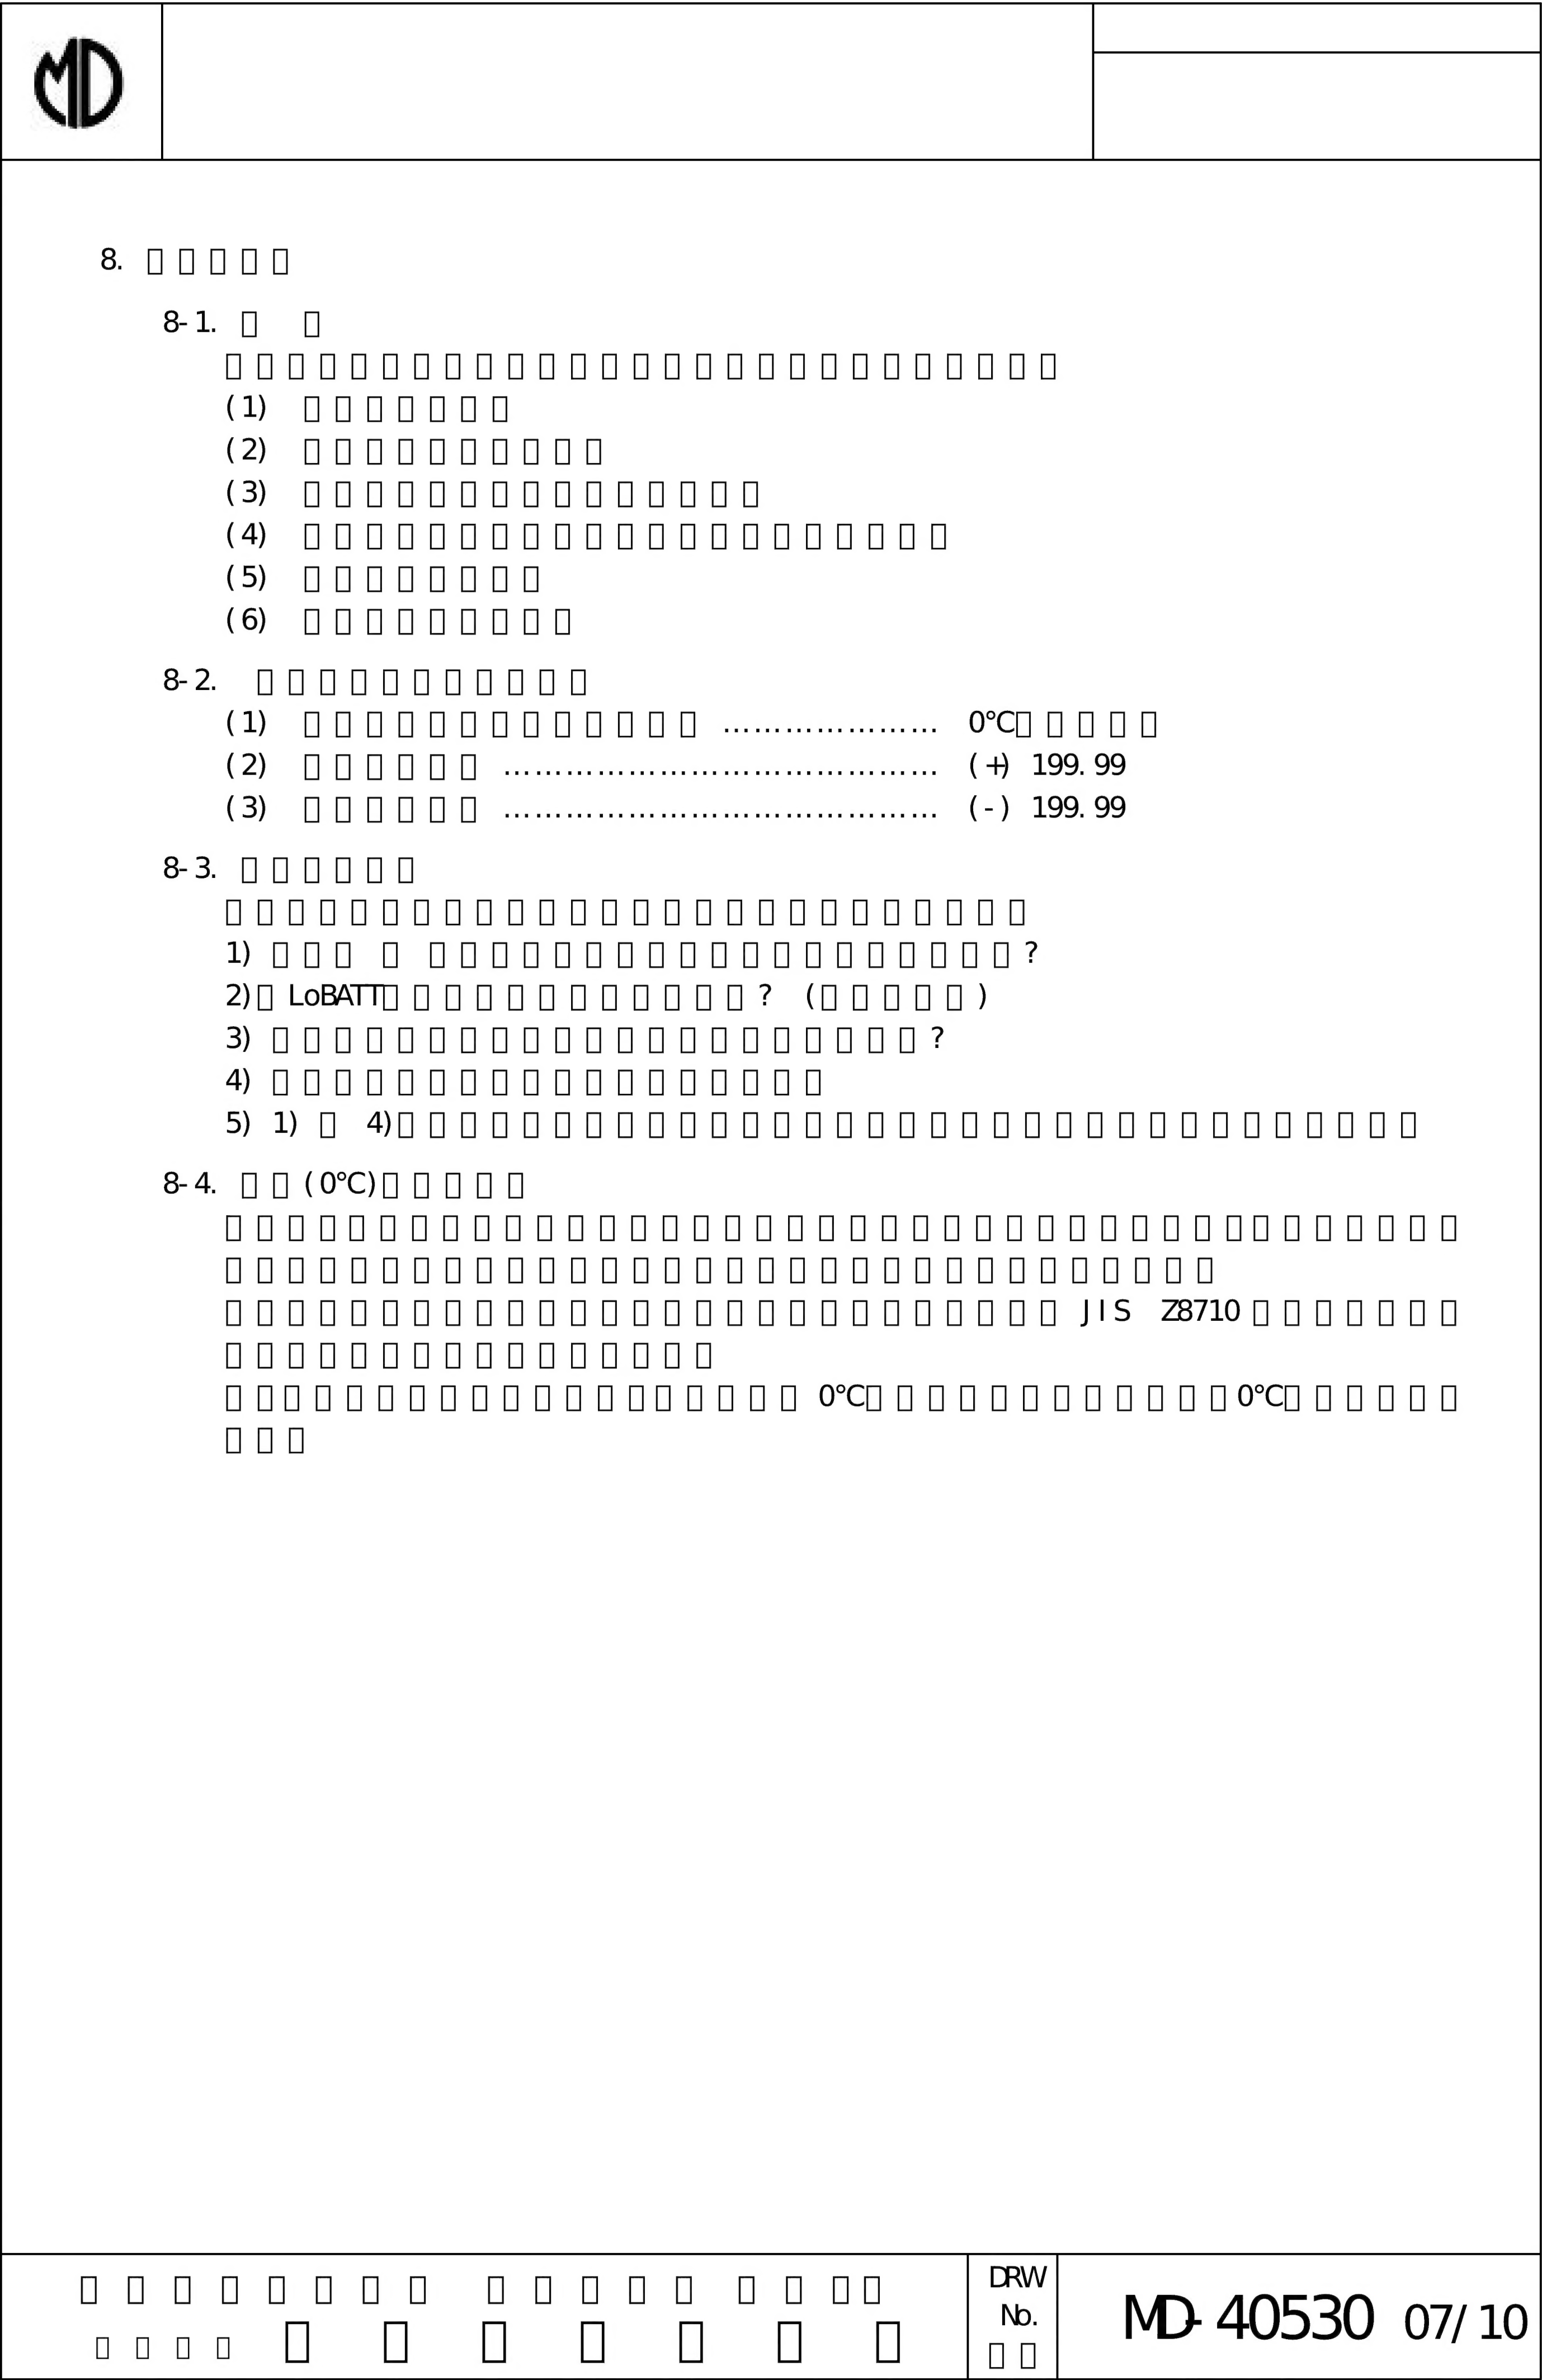

8. [illegible]

8-1. [illegible]

[illegible]

(1) [illegible]

(2) [illegible]

(3) [illegible]

(4) [illegible]

(5) [illegible]

(6) [illegible]

8-2. [illegible]

(1) [illegible] ………………… 0℃[illegible]

(2) [illegible] …………………………………… (+) 199.99

(3) [illegible] …………………………………… (-) 199.99

8-3. [illegible]

[illegible]

1) [illegible]?

2) [illegible] LoBATT [illegible]? ([illegible])

3) [illegible]?

4) [illegible]

5) 1) [illegible] 4) [illegible]

8-4. [illegible] (0℃) [illegible]

[illegible]

[illegible] JIS Z8710 [illegible]

[illegible] 0℃ [illegible] 0℃ [illegible]

MD

◎[illegible]

[illegible] 0℃ [illegible] ± 0. 01 deg [illegible] 2 [illegible]
[illegible]

[illegible] 2. [illegible]

サイホン
検出素子
A B
補助容器
魔法びん

[illegible]
[illegible] 0℃ [illegible]
[illegible]
[illegible]
[illegible] B [illegible] A [illegible]
[illegible] B [illegible] B [illegible]
[illegible]
[illegible]
[illegible]

(1) [illegible]

(2) [illegible] 0℃ [illegible]

(3) [illegible]

9. □ □

[□ □ □]

(1) □□□□ −100 □ +200℃ (□□□□□□□ : ±20℃)

(2) □□□ 0.01℃

(3) □□□□ ※[□] ◎ −20□ +50℃□□□ ………… ±0.1℃

◎ □□□□□□ ………………… □□□□±0.2%

(4) □□□ Pt 100 (4□□□)

(5) □□□□□ 1mA (0℃□□□)

(6) □□□ □□□□□ (LCD) 4 1/2 □

(7) □□□□□□ □ 3□ / □

(8) □□□□□□□□ □ □□□□□□ □□□□□□□ 1200/2400/4800/9600bps□□□□□□□□

□□□□□ □ 8bit□□□□

□□□□□ □ □□□□□□

□□□□□ □ 1bit□□□□

(9) □□□□□ □□□□□□□□□□□□□□□□□□(□□□□□□□□)

□□□□□□ □□□□□ □□□□□ C/R L/F □□□□□□□□□□

□□□□ 4-4□□□□□□□□□□□□□□□

(10) □□□□ □□□□□□ 16□□□□□□□

00:01(1□) 00:02(2□) 00:03(3□) 00:04(4□)

00:05(5□) 00:10(10□) 00:20(20□) 00:30(30□)

01:00(1□) 02:00(2□) 03:00(3□) 04:00(4□)

05:00(5□) 10:00(10□) 20:00(20□) 30:00(30□)

00:00□□□□□□□□□□□

□)<u>**□□□□□□□ 5 □□□□□□□ 1□ 4 □□□□□□□□**</u>

(12) □ □ ◎□ 3□□□(1.5V) 4□

(□□□□□□□□□□□ 150□□)

(13) □□□□ 100W× 180L× 44T (□□□□□□□)

(14) □ □ □ 500g

(15) □□□□□□□ ◎ □□□□ 23±5℃ 40□ 85%RH

(□□□□□□□) ◎ □□□□ 0 □ 40℃ 30□ 90%RH

◎ □□□□ −10□ +60℃ 30□ 90%RH

(16) □□□□□□□□□□ ◎ A□□ B 10mV/℃

◎ A− B 100mV/℃

※[□]□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□
□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□
□□□□□□□□□□□□

10. □ □ □

AC− DC □□□□□□□ 1□ □9V 300mA□□□□□□□□□□

□□□□□□□□□□□□□□ 2□ □□□□□ 1.2m□

□□□□□□□□□□□□□□ 1□ □□□□□ 3m□

□□□□□ 1□

[□]□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□
□□□□□□□□
□□□□□□□□□□□□□□□□□□□□□□□□□□1□□□□1□□□□□
□□

11. □□□□□

11-1. □□□□□□□□□□□□□□□□□□□□□□□□

□　□□BL-58SL□□□□□□PRINTY3□□□□□□

□　□□58mm

□□□□□□□□

□　□□□□AC-DC□□□□□□AC100V□□□□□□□□□□□□□□□□□4□□

□　□□4-4□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□

□□DPS-2001□□□□□□　□□□□□□□□□□□□□□□□□□□□□□□□□□

□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□

11-2. □□□□□□□□□□

□□□□□□□Dsub9P□DOS/V□□□□□□□□□□□□□□□□□□□□□□□□

□□□□□PC-9801/21□□□□□□□□□□□□□□□□RS-232C□□Dsub25P□□□□

□□□□□□□□□□□□□□□□□□□□□□□□9P-25P□□□□□□□□□□□□

□□□

□□□□□□□□□□□□□□□□□□□□3.5φ□□□□□□□□□□□□□□□□□□

□□□□□□□□□□□□□□□□□□□□□□□□□□□

□□D-SUB 25P□□□

1 3 4 5 6 7 20

3P□7P□□□□□□
4P□5P□□6P□20P□□□□□□

D-SUB 9P (DOS/V) □□□

1 2 6 7 8 4 5

2P□5P□□□□□□
7P□8P□□4P□6P□□□□□□

※□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□